



**Face to face to EN558-2 basic 1 (DN50-150), EN558-2 basic28 (DN200-300)
Flanges and drilling to BS EN 1092-2**

Use:

For water to max. 90°C

Tests:

Hydraulic test to BS EN 12266

Seat: 1.1 x PN

Body: 1.5 x PN

Marking:

Body: ICV logo, DN, PN, casting no.
and flow direction.


Materials

Body	Stainless steel AISI 304/316
Seat	Stainless steel AISI 304/316
Disc	Stainless steel AISI 304/316
Disc nut	Stainless steel AISI 304/316
Stem	Stainless steel AISI 304/316
Bonnet	Stainless steel AISI 304/316
Bolt	Stainless steel AISI 304/316



Face to face to EN558-2 basic 1 (DN50-150), EN558-2 basic28 (DN200-300)
 Flanges and drilling to BS EN 1092-2

Component list		
1. Body	4. Disc nut	7. Bolt
2. Seat	5. Stem	
3. Disc	6. Bonnet	

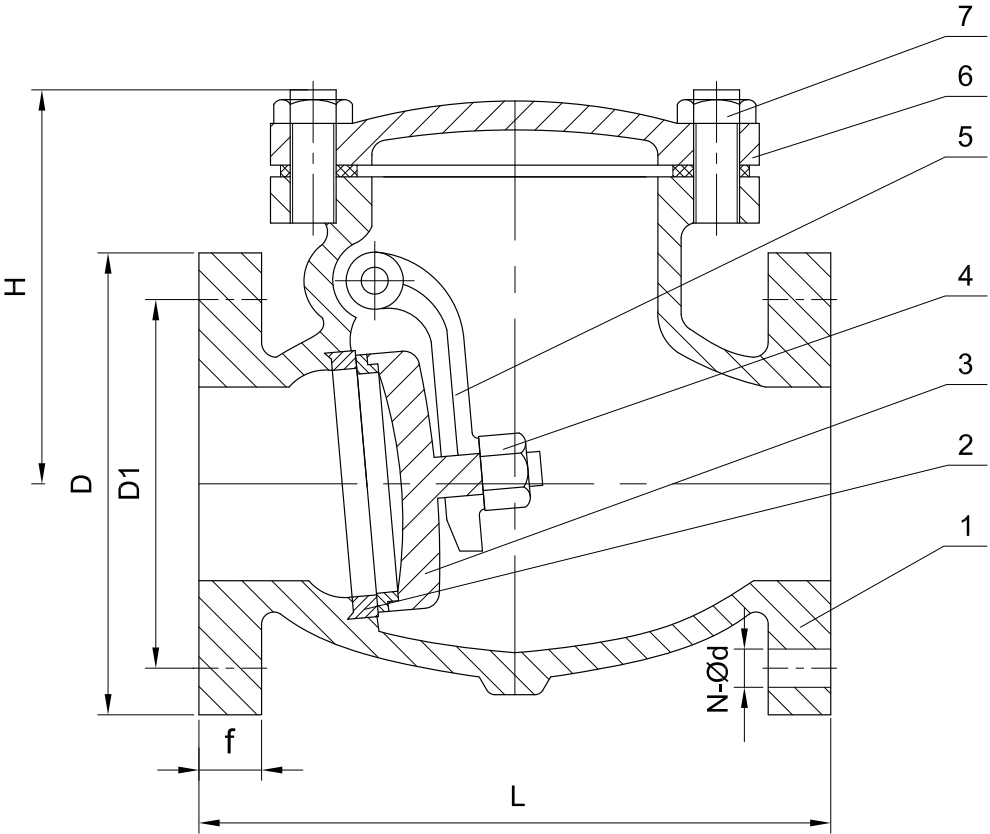

Ref.no.	DN	L		H		D		D1		N-Ød		f		Weight	
		mm	mm	mm	mm	mm	mm	mm	mm			mm	mm	Kgs	Kgs
						PN16	PN25	PN16	PN25	PN16	PN25	PN16	PN25	PN16	PN25
904020050X0YY	50	230	135	160	125					4-Ø18		16	20	8.8	8.8
904020065X0YY	65	290	140	180	145					4-Ø18	8-Ø18	18	22	14	14
904020080X0YY	80	310	145	195	160					8-Ø18	8-Ø18	20	22	16.7	16.7
904020100X0YY	100	350	165	215	180	230	190			8-Ø18	8-Ø23	20	24	22.5	27
904020125X0YY	125	400	250	245	210	270	220			8-Ø18	8-Ø25	22	28	31.3	39
904020150X0YY	150	480	295	280	240	300	250			8-Ø23	8-Ø25	24	30	43.2	54.7
904020200X0YY	200	550	315	335	295	360	310			12-Ø23	12-Ø25	26	34	84.7	98
904020250X0YY	250	650	430	405	355	425	370			12-Ø25	12-Ø30	30	36	150	170
904020300X0YY	300	750	480	460	410	485	430			12-Ø25	16-Ø30	30	40	170	206

X=1, PN16
 X=3, PN25
 YY=Different materials

