



Stainless steel gate valve PN16/25

907/01

To BS 5352
Thread to BSPT (standard), BSPP(optional)

Use:
For water to max. 90°C

Tests:
Hydraulic test to BS EN 12266
Seat: 1.1 x PN
Body: 1.5 x PN

Marking:
To BS 5352
Body: ICV logo, DN, PN, casting no.
and body material.

Materials	
Body	Stainless steel AISI 304/316
Disc	Stainless steel AISI 304/316
Gasket	PTFE
Stem	Stainless steel AISI 304/316
Bonnet	Stainless steel AISI 304/316
Gland nut	Stainless steel AISI 304
Packing	PTFE
Hand wheel	Cast iron
Hand wheel nut	Stainless steel AISI 304




The designs, materials and specifications shown are subject to change without notice due to our continuing programme of product development.

A Member of the AVK Group

DS907011901

To BS 5352
 Thread to BSPT (standard), BSPP(optional)

Component list		
1. Body	4. Stem	7. Packing
2. Disc	5. Bonnet	8. Hand wheel
3. Gasket	6. Gland nut	9. Hand wheel nut

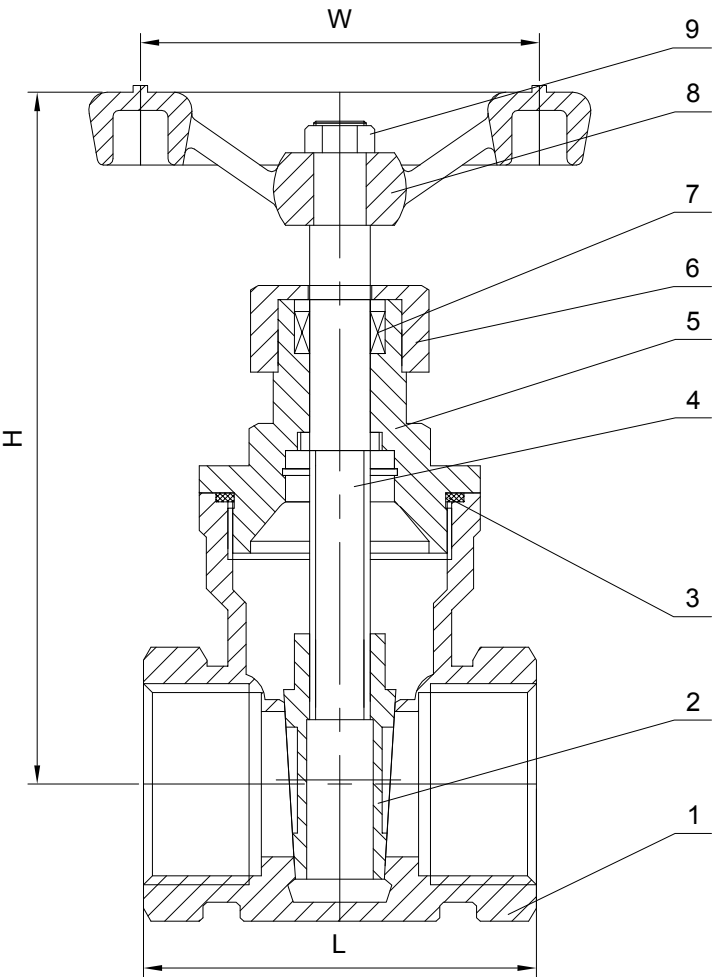

Ref.no.	DN	L mm	H mm	W mm	Weight Kgs
907010015X0YY	15	51	85	72	0.5
907010020X0YY	20	57	92	72	0.65
907010025X0YY	25	63	105	78	0.79
907010032X0YY	32	73	138	100	1.27
907010040X0YY	40	75	145	100	1.74
907010050X0YY	50	88	162	100	2.19

X=1, PN16; X=3, PN25
 YY= Different material

