



Thread to BSPT (standard), BSPP(optional)

Use:

For water to max. 90°C

Tests:

Hydraulic test to BS EN 12266

Seat: 1.1 x PN

Body: 1.5 x PN

Marking:

To BS 5351

Body: ICV logo, DN, PN, casting no.
and body material.


Materials

Body	Stainless steel AISI 304/316
Ball	Stainless steel AISI 304/316
Seat	PTFE
Gasket	PTFE
Stem	Stainless steel AISI 304/316
Packing	PTFE
Lever	Stainless steel AISI 304
Nut	Stainless steel AISI 304



Thread to BSPT (standard), BSPP(optional)

Component list		
1. Body	4. Gasket	7. Lever
2. Ball	5. Stem	8. Nut
3. Seat	6. Packing	

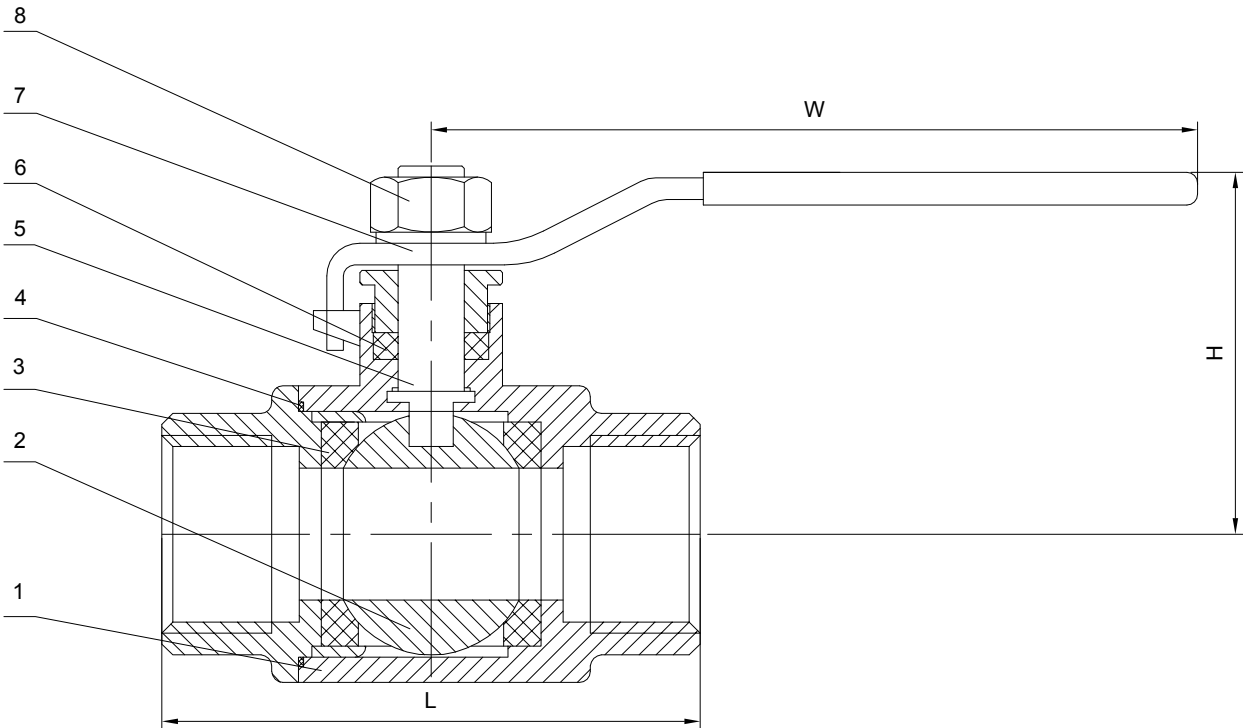

Ref.no.	DN	L mm	H mm	W mm	Weight Kgs
907040015X0YY	15	57	57	95	0.25
907040020X0YY	20	67	66	118	0.42
907040025X0YY	25	80	68	132	0.67
907040032X0YY	32	86	78	145	1.05
907040040X0YY	40	100	85	168	1.56
907040050X0YY	50	116.5	100	182	2.01

X=1, PN16
X=3, PN25
YY=Different material

