



Rubber expansion joint double sphere 911/03 (thread end) PN16

Thread to BS 21

Use:

For water to max. 90°C

Tests:

Hydraulic test to BS EN 12266

Body: 1.5 x PN

Marking:

Body: ICV logo, DN, PN and body material.

Materials

Body	EPDM
Reinforcement	Nylon tire cord
Union	Galvanized Ductile iron



The designs, materials and specifications shown are subject to change without notice due to our continuing programme of product development.

A Member of the AVK Group

Expect... **AVK**

DS911031710


Thread to BS 21

Component list

1. Body

2. Reinforcement

3. Union

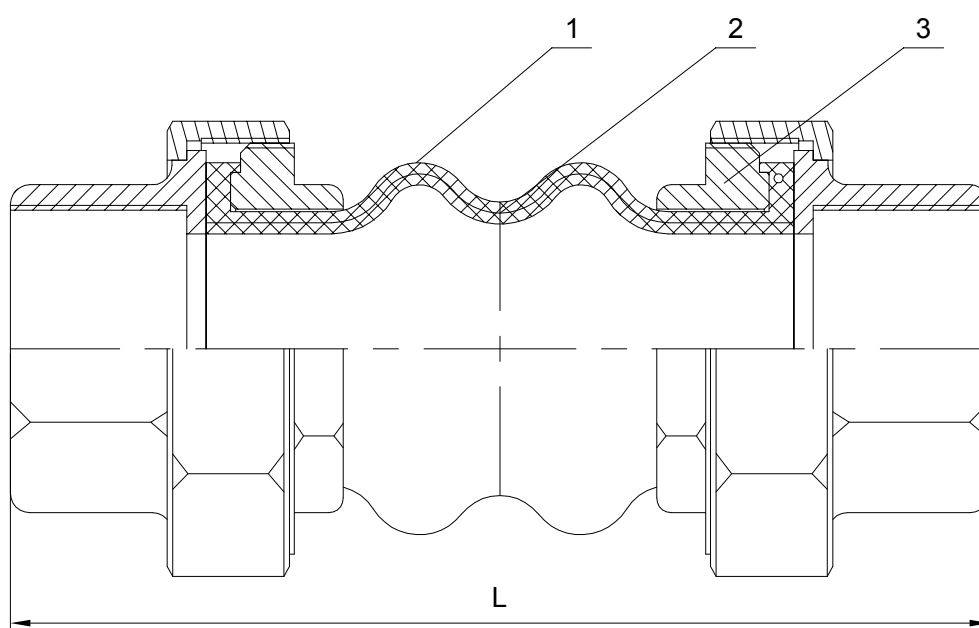

Ref.no.	DN	L mm	Axial compression mm	Axial elongation mm	Transverse deflection mm	Angular deflection	Weight Kgs
9110300151	15	200	22	6	22	45°	0.5
9110300201	20	200	22	6	22	45°	0.7
9110300251	25	200	22	6	22	45°	1
9110300321	32	200	22	6	22	45°	1.2
9110300401	40	200	22	6	22	45°	1.7
9110300501	50	200	22	6	22	45°	2.6
9110300651	65	240	22	6	22	45°	3.4
9110300801	80	240	22	6	22	45°	5.2

*Installation length should according to product structure length, Deviation ≤ 3mm.

