



Thread to BS 21

Use:

For water to max. 90°C

Tests:

Hydraulic test to BS EN 12266
Body: 1.5 x PN

Marking:

Body: ICV Stickers. DN, PN and body material.

Materials

Union	Zinc plated brass
Body	Stainless steel AISI 304
Braid	Stainless steel AISI 304 (DN25)



DN15-20




DN25



Thread to BS 21

Component list

- 1. Union
- 2. Body

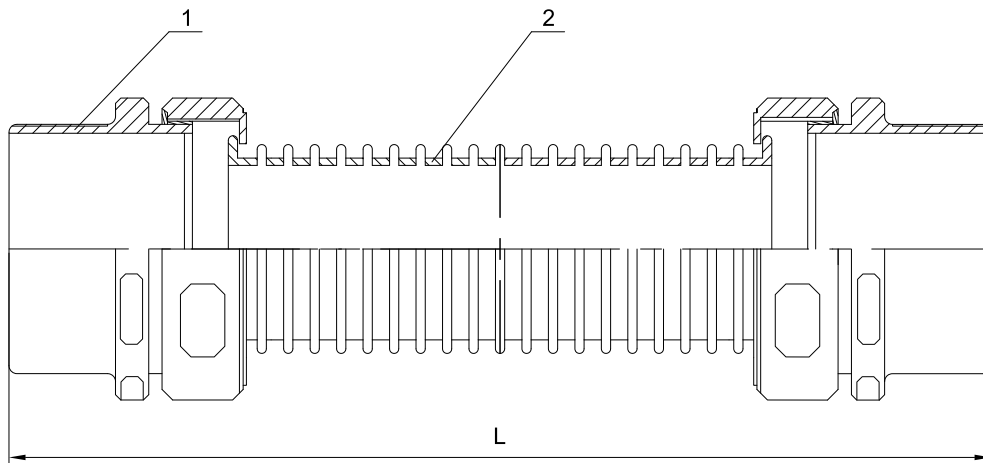

Ref.no.	DN	L mm	Weight Kgs
91104001510XYYYY	15	300	0.12
91104002010XYYYY	20	300	0.36
91104002510XYYYY	25	300	0.6

XX=00, Standard(without braid)
 XX=01, With braid
 YYY=Different structure length
 YYY=000, standard (in the table above)
 YYY=Other data, non standard type

