



To BS EN 593

Face to face dimension to BS EN 558 Series 20

Flanges and drillings to BS EN 1092-2

Use:

For water to max. 100°C

Tests:

Hydraulic test to BS EN 1074-1

Seat: 1.1 x PN

Body: 1.5 x PN

Operating torque test

Optional extras:

Lever, worm gear and electric actuator.

DN50-150 c/w lever

DN200-300 c/w worm gear

Materials


Body*	Stainless steel AISI304
Disc*	Stainless steel AISI304
Seat*	EPDM
Stem*	Stainless steel AISI420/2Cr13
Lever	Aluminum
Worm gear	Cast iron

*Other material available on request



To BS EN 593
 Face to face dimension to BS EN 558 Series 20
 Flanges and drillings to BS EN 1092-2


Component list		
1. Body	3. Seat	5. Stem
2. Stem	4. Disc	

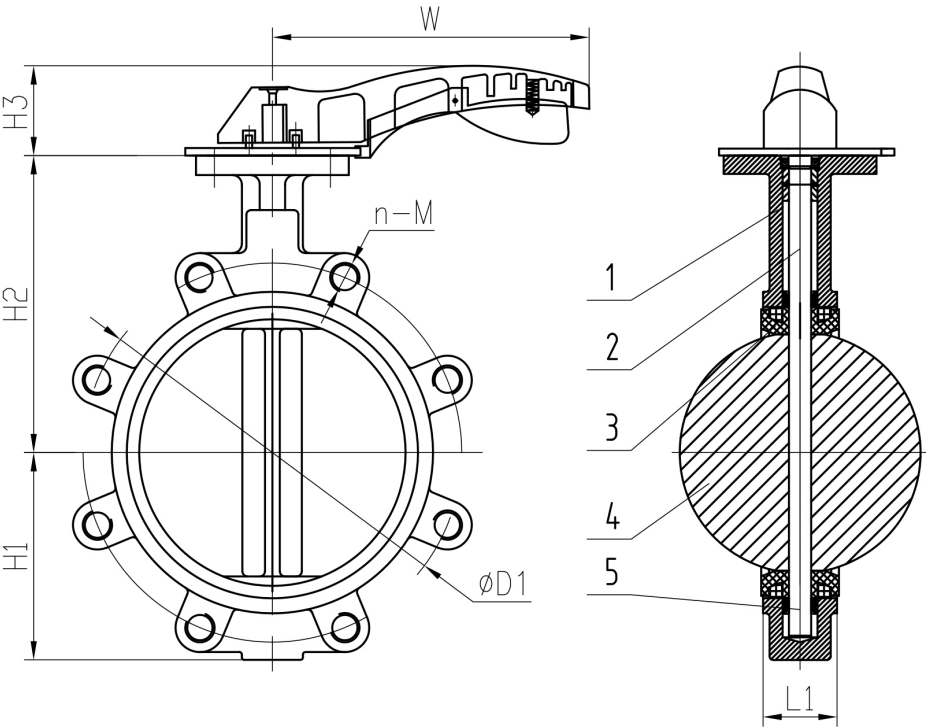

Ref.no.	DN	PN	L1	H1	H2	H3	W	D1	n-M
			mm	mm	mm	mm	mm	mm	
9250100501019	50	PN16	42	80	156	70	175	125	4-M16
9250100651019	65	PN16	45	89	162	70	175	145	4-M16
9250100801019	80	PN16	45	95	170	70	175	160	8-M16
9250101001019	100	PN16	52	114	185	75	200	180	8-M16
9250101251019	125	PN16	55	127	207	80	260	210	8-M16
9250101501019	150	PN16	56	139	216	80	260	240	8-M20

To BS EN 593
 Face to face dimension to BS EN 558 Series 20
 Flanges and drillings to BS EN 1092-2

Component list		
1. Body	3. Seat	5. Stem
2. Stem	4. Disc	

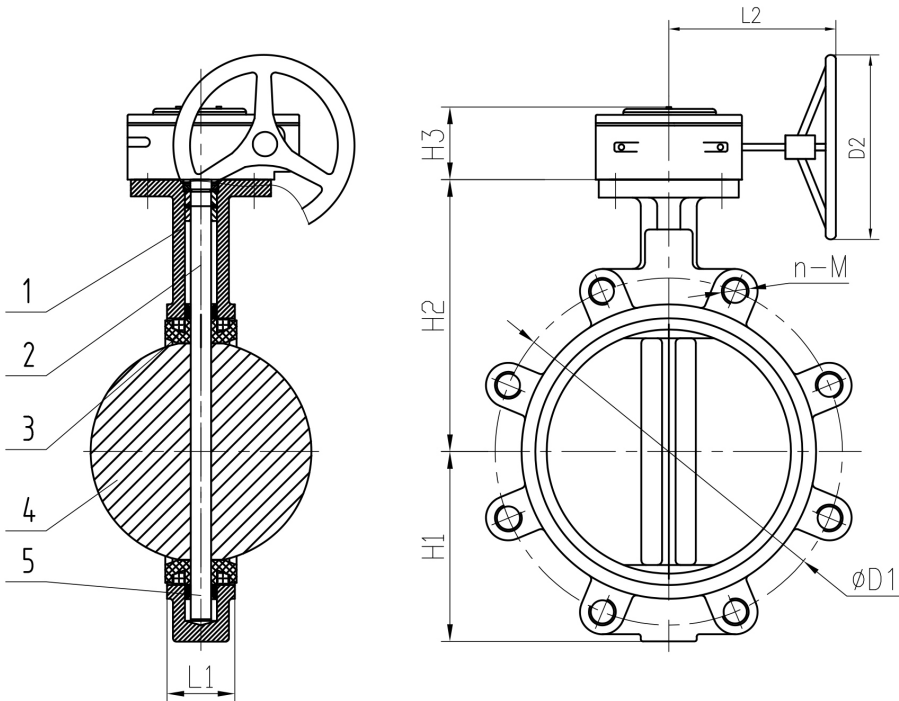

Ref.no.	DN	PN	L1 mm	H1 mm	H2 mm	H3 mm	L2 mm	D1 mm	D2 mm	n-M
92501005010192	50	PN16	42	80	156	67	150	125	145	4-M16
92501006510192	65	PN16	45	89	162	67	150	145	145	4-M16
92501008010192	80	PN16	45	95	170	67	150	160	145	8-M16
92501010010192	100	PN16	52	114	185	67	150	180	145	8-M16
92501012510192	125	PN16	55	127	207	67	150	210	145	8-M16
92501015010192	150	PN16	56	139	216	67	150	240	145	8-M20
9250102001019	200	PN16	61	175	256	84	207	295	285	12-M20
9250102501019	250	PN16	66	203	248	84	207	355	285	12-M24
9250103001019	300	PN16	77	242	280	84	207	410	285	12-M24