




To BS 5154
Thread to BSPT (standard), BSPP(optional)

Use:
For water to max. 90°C

Tests:
Hydraulic test to BS EN 12266
Sest: 1.1 x PN
Body: 1.5 x PN

Marking:
To BS 5154
Body: ICV logo, DN and PN.

Materials	
Disc	Bronze CC491K
Body	Bronze CC491K
Bonnet	Bronze CC491K
Gasket	PTFE
Stem bush	Brass CW617N
Packing	PTFE
Packing nut	Brass CW617N
Stem	DZR Brass CW602N
Hand wheel	Aluminium DN15-50
	Cast iron DN65-80
Hand wheel nut	Brass CW617N

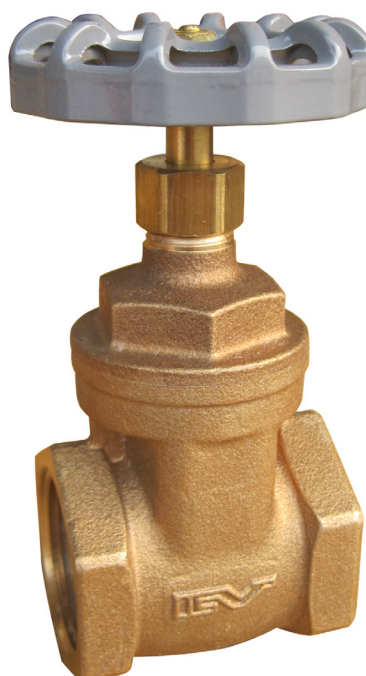

To BS 5154
Thread to BSPT (standard), BSPP(optional)

Component list

1. Disc

2. Body

3. Bonnet


4. Gasket
5. Stem bush

6. Packing

7. Packing nut

8. Hand wheel
9. Stem

10. Hand wheel nut

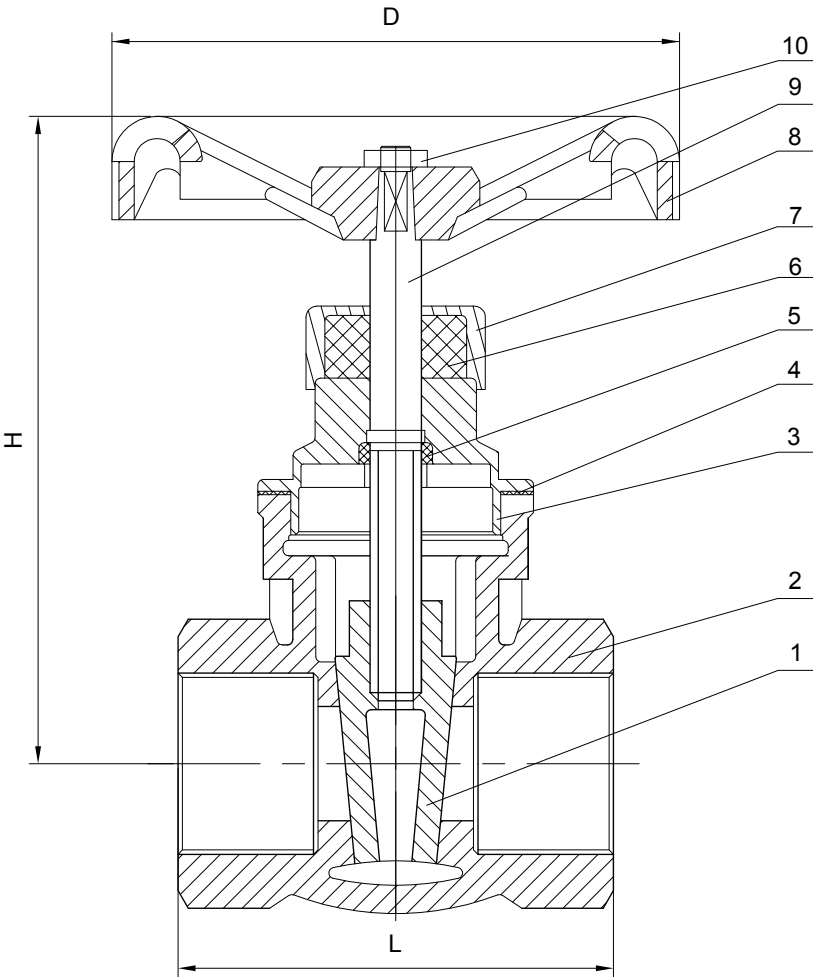

Ref.no.	DN	L	H	D	Kvs	Weight
		mm	mm	mm	m³/h	Kgs
9060200152	15	42	74	52	16	0.23
9060200202	20	47	86.5	60	36	0.35
9060200252	25	53	95	60	60	0.50
9060200322	32	62	116	70	90	0.77
9060200402	40	64	125	78	140	0.99
9060200502	50	76	150	92	270	1.62
9060200652	65	87	190	100	470	2.98
9060200802	80	105	215	110	680	4.8

