



Bronze globe valve PN16

906/04
002

To BS 5154
Thread to BSPT (standard), BSPP(optional)

Use:
For water to max. 90°C

Tests:
Hydraulic test to BS EN 12266
Seat: 1.1 x PN
Body: 1.5 x PN

Marking:
To BS 5154
Body: ICV logo, DN, PN and flow direction.

Materials	
Disc	DZR Brass CW602N(DN15-DN25) Bronze CC491K(DN32-DN50)
Body	Bronze CC491K
Bonnet	Bronze CC491K
Gasket	PTFE
Stem bush	Brass CW617N
Packing	PTFE
Packing nut	Brass CW617N
Stem	DZR Brass CW602N
Hand wheel	Aluminium
Hand wheel nut	Brass CW617N



Expect... **AVK**


The designs, materials and specifications shown are subject to change without notice due to our continuing programme of product development.

A Member of the AVK Group

DS906040021901

To BS 5154
Thread to BSPT (standard), BSPP(optional)

Component list		
1. Disc	4. Bonnet	7. Stem
2. Body	5. Packing	8. Hand wheel
3. Gasket	6. Packing nut	9. Hand wheel nut

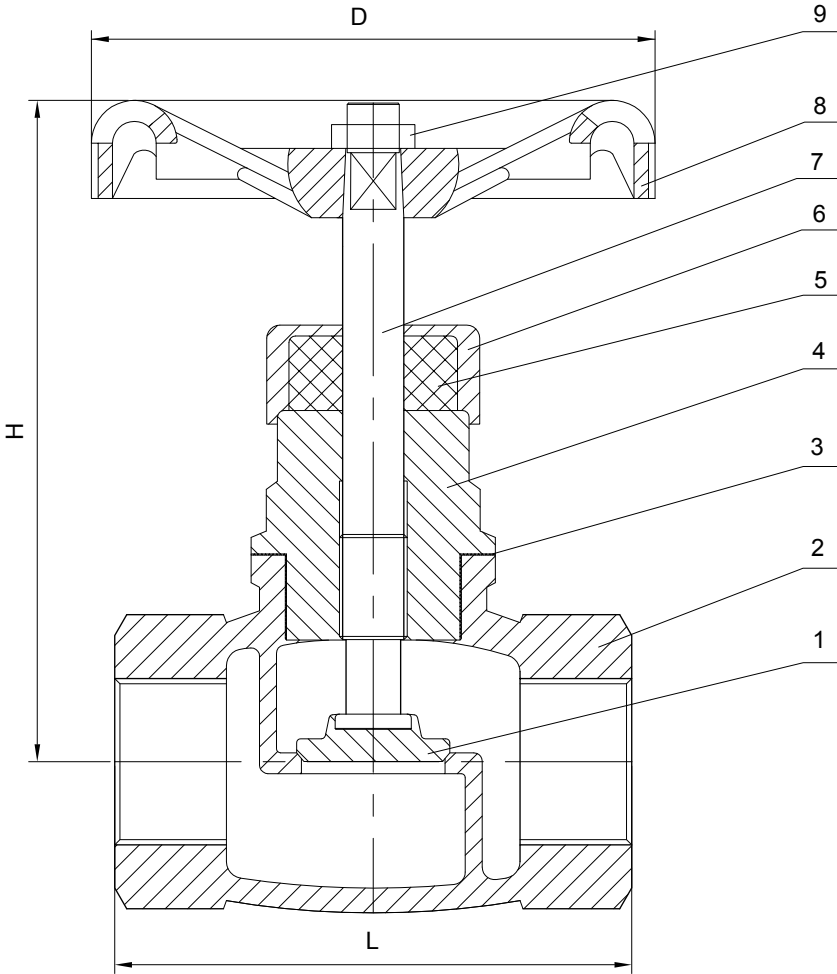

Ref.no.	DN	L mm	H mm	D mm	Weight Kgs
9060400151	15	49	71	52	0.24
9060400201	20	56	73	60	0.34
9060400251	25	66	87	65	0.51
9060400321	32	74	95	70	0.71
9060400401	40	85	110	78	1.03
9060400501	50	100	124	92	1.59

